










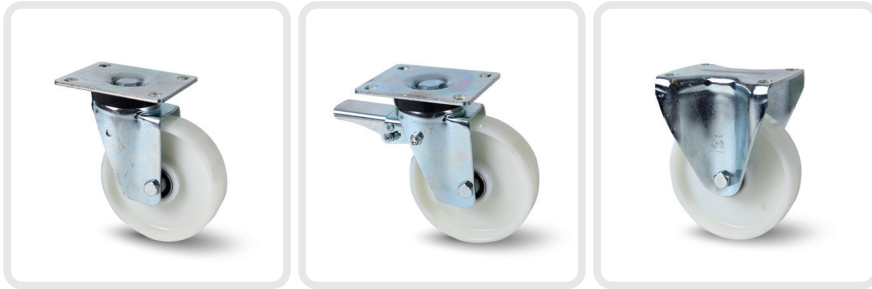








Load wheels • Laufräder PLSK serie • Serie PLSK

Load capacity till 550kg • Tragfähigkeit bis 550kg
Wheel diameter 100<>200mm • Raddurchmesser 100<>200mm



Wheel in high quality polyamide PA6 (extra solid version): colour white, high wear resistance, shock- and impact resistant - on precision ball bearings. Mounted in a heavy duty pressed steel castor with double ball race: zinc-plated, sealed, shock resistant - types: swivel, swivel+brake, fixed.

Rad in hochwertigem Polyamid PA6 (extra solide Ausführung): Farbe weiß, hohe Abriebfestigkeit, stoß- und schlagfest - mit Präzisionskugellagern. Montiert in einem stahlgepreßten Schwerlastgehäuse mit zweireihigem Kugelkranz: glanzverzinkt, abgedichtet, stoßfest - Typen: Lenk, Lenk+Feststeller, Bock.

            											
PL SK 100 UKN	PL SK 100 UKNR	PL SK 100 UVN	100	40	100×85	80×60	9×12	36		135	175
PL SK 125 UKN	PL SK 125 UKNR	PL SK 125 UVN	125	45	135×110	105×80	13×16	45		166	300
PL SK 150 UKN	PL SK 150 UKNR	PL SK 150 UVN	150	50	135×110	105×80	13×16	57		211	400
PL SK 200 UKN	PL SK 200 UKNR	PL SK 200 UVN	200	57	135×110	105×80	13×16	57		251	550

